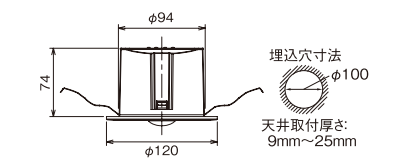
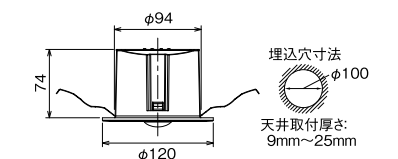
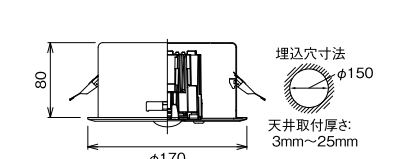


LED非常用照明器具 専用形 一般形

	埋込[φ100]	埋込[φ100]	埋込[φ150]																																																																																																
一般形 30分間																																																																																																			
9形 低天井用 [~3m]	LEDEM09221M ¥52,000 ○ K1-LRS11-1 定格消費電力 0.8W 蓄電池:3HR-AH-BE 非常灯評定番号 LALE-001 保守率 0.93(照度2ルクスの範囲) <table><tr><td>取付の高さ</td><td>2.1m</td><td>2.4m</td><td>2.6m</td><td>3.0m</td></tr><tr><td>単体配置 A1</td><td>4.0</td><td>4.3</td><td>4.4</td><td>2.9</td></tr><tr><td>直線配置 A2</td><td>8.8</td><td>9.8</td><td>10.2</td><td>11.2</td></tr><tr><td>四角配置 A4</td><td>7.1</td><td>7.8</td><td>8.3</td><td>9.2</td></tr></table>	取付の高さ	2.1m	2.4m	2.6m	3.0m	単体配置 A1	4.0	4.3	4.4	2.9	直線配置 A2	8.8	9.8	10.2	11.2	四角配置 A4	7.1	7.8	8.3	9.2	LEDEM09221MK ¥56,300 ○ 定格消費電力 0.8W 蓄電池:3HR-AH-BE 非常灯評定番号 LALE-001 保守率 0.93(照度2ルクスの範囲) <table><tr><td>取付の高さ</td><td>2.1m</td><td>2.4m</td><td>2.6m</td><td>3.0m</td></tr><tr><td>単体配置 A1</td><td>4.0</td><td>4.3</td><td>4.4</td><td>2.9</td></tr><tr><td>直線配置 A2</td><td>8.8</td><td>9.8</td><td>10.2</td><td>11.2</td></tr><tr><td>四角配置 A4</td><td>7.1</td><td>7.8</td><td>8.3</td><td>9.2</td></tr></table>	取付の高さ	2.1m	2.4m	2.6m	3.0m	単体配置 A1	4.0	4.3	4.4	2.9	直線配置 A2	8.8	9.8	10.2	11.2	四角配置 A4	7.1	7.8	8.3	9.2	※LEDEM09221M+LEDEM05022の 組合せで対応可能																																																								
取付の高さ	2.1m	2.4m	2.6m	3.0m																																																																																															
単体配置 A1	4.0	4.3	4.4	2.9																																																																																															
直線配置 A2	8.8	9.8	10.2	11.2																																																																																															
四角配置 A4	7.1	7.8	8.3	9.2																																																																																															
取付の高さ	2.1m	2.4m	2.6m	3.0m																																																																																															
単体配置 A1	4.0	4.3	4.4	2.9																																																																																															
直線配置 A2	8.8	9.8	10.2	11.2																																																																																															
四角配置 A4	7.1	7.8	8.3	9.2																																																																																															
13形 低天井用 [~3m]	LEDEM13221M ¥54,900 ○ K1-LRS11-2 定格消費電力 0.8W 蓄電池:3HR-AH-BE 非常灯評定番号 LALE-001 保守率 0.93(照度2ルクスの範囲) <table><tr><td>取付の高さ</td><td>2.1m</td><td>2.4m</td><td>2.6m</td><td>3.0m</td><td>4.0m</td></tr><tr><td>単体配置 A1</td><td>4.4</td><td>4.8</td><td>5.0</td><td>5.3</td><td>3.3</td></tr><tr><td>直線配置 A2</td><td>9.4</td><td>10.4</td><td>11.0</td><td>12.2</td><td>14.4</td></tr><tr><td>四角配置 A4</td><td>7.5</td><td>8.3</td><td>8.8</td><td>9.8</td><td>11.9</td></tr></table>	取付の高さ	2.1m	2.4m	2.6m	3.0m	4.0m	単体配置 A1	4.4	4.8	5.0	5.3	3.3	直線配置 A2	9.4	10.4	11.0	12.2	14.4	四角配置 A4	7.5	8.3	8.8	9.8	11.9	LEDEM13221MK ¥59,200 ○ 定格消費電力 0.8W 蓄電池:3HR-AH-BE 非常灯評定番号 LALE-001 保守率 0.93(照度2ルクスの範囲) <table><tr><td>取付の高さ</td><td>2.1m</td><td>2.4m</td><td>2.6m</td><td>3.0m</td><td>4.0m</td></tr><tr><td>単体配置 A1</td><td>4.4</td><td>4.8</td><td>5.0</td><td>5.3</td><td>3.3</td></tr><tr><td>直線配置 A2</td><td>9.4</td><td>10.4</td><td>11.0</td><td>12.2</td><td>14.4</td></tr><tr><td>四角配置 A4</td><td>7.5</td><td>8.3</td><td>8.8</td><td>9.8</td><td>11.9</td></tr></table>	取付の高さ	2.1m	2.4m	2.6m	3.0m	4.0m	単体配置 A1	4.4	4.8	5.0	5.3	3.3	直線配置 A2	9.4	10.4	11.0	12.2	14.4	四角配置 A4	7.5	8.3	8.8	9.8	11.9	LEDEM13621M ¥54,900 ○ 定格消費電力 0.8W 蓄電池:3HR-AH-SLN 非常灯評定番号 LALE-001 保守率 0.93(照度2ルクスの範囲) <table><tr><td>取付の高さ</td><td>2.1m</td><td>2.4m</td><td>2.6m</td><td>3.0m</td><td>4.0m</td></tr><tr><td>単体配置 A1</td><td>4.4</td><td>4.8</td><td>5</td><td>5.3</td><td>3.3</td></tr><tr><td>直線配置 A2</td><td>9.4</td><td>10.4</td><td>11</td><td>12.2</td><td>14.4</td></tr><tr><td>四角配置 A4</td><td>7.5</td><td>8.3</td><td>8.8</td><td>9.8</td><td>11.9</td></tr></table>	取付の高さ	2.1m	2.4m	2.6m	3.0m	4.0m	単体配置 A1	4.4	4.8	5	5.3	3.3	直線配置 A2	9.4	10.4	11	12.2	14.4	四角配置 A4	7.5	8.3	8.8	9.8	11.9																								
取付の高さ	2.1m	2.4m	2.6m	3.0m	4.0m																																																																																														
単体配置 A1	4.4	4.8	5.0	5.3	3.3																																																																																														
直線配置 A2	9.4	10.4	11.0	12.2	14.4																																																																																														
四角配置 A4	7.5	8.3	8.8	9.8	11.9																																																																																														
取付の高さ	2.1m	2.4m	2.6m	3.0m	4.0m																																																																																														
単体配置 A1	4.4	4.8	5.0	5.3	3.3																																																																																														
直線配置 A2	9.4	10.4	11.0	12.2	14.4																																																																																														
四角配置 A4	7.5	8.3	8.8	9.8	11.9																																																																																														
取付の高さ	2.1m	2.4m	2.6m	3.0m	4.0m																																																																																														
単体配置 A1	4.4	4.8	5	5.3	3.3																																																																																														
直線配置 A2	9.4	10.4	11	12.2	14.4																																																																																														
四角配置 A4	7.5	8.3	8.8	9.8	11.9																																																																																														
30形 中天井用 [~6m]	LEDEM30221M ¥97,200 ○ K1-LRS11-3 定格消費電力 1.5W 蓄電池:7HR-AH-BE 非常灯評定番号 LALE-025 保守率 0.93(照度2ルクスの範囲) <table><tr><td>取付の高さ</td><td>2.1m</td><td>2.4m</td><td>2.6m</td><td>3.0m</td><td>4.0m</td><td>5.0m</td><td>6.0m</td></tr><tr><td>単体配置 A1</td><td>5.5</td><td>6.1</td><td>6.4</td><td>7.0</td><td>8.0</td><td>6.6</td><td>5.6</td></tr><tr><td>直線配置 A2</td><td>11.6</td><td>13.0</td><td>13.8</td><td>15.4</td><td>18.8</td><td>21.4</td><td>22.4</td></tr><tr><td>四角配置 A4</td><td>8.9</td><td>10.0</td><td>10.7</td><td>12.0</td><td>15.0</td><td>17.5</td><td>19.6</td></tr></table>	取付の高さ	2.1m	2.4m	2.6m	3.0m	4.0m	5.0m	6.0m	単体配置 A1	5.5	6.1	6.4	7.0	8.0	6.6	5.6	直線配置 A2	11.6	13.0	13.8	15.4	18.8	21.4	22.4	四角配置 A4	8.9	10.0	10.7	12.0	15.0	17.5	19.6	LEDEM30221MK ¥102,000 ○ 定格消費電力 1.5W 蓄電池:7HR-AH-BE 非常灯評定番号 LALE-025 保守率 0.93(照度2ルクスの範囲) <table><tr><td>取付の高さ</td><td>2.1m</td><td>2.4m</td><td>2.6m</td><td>3.0m</td><td>4.0m</td><td>5.0m</td><td>6.0m</td></tr><tr><td>単体配置 A1</td><td>5.5</td><td>6.1</td><td>6.4</td><td>7.0</td><td>8.0</td><td>6.6</td><td>5.6</td></tr><tr><td>直線配置 A2</td><td>11.6</td><td>13.0</td><td>13.8</td><td>15.4</td><td>18.8</td><td>21.4</td><td>22.4</td></tr><tr><td>四角配置 A4</td><td>8.9</td><td>10.0</td><td>10.7</td><td>12.0</td><td>15.0</td><td>17.5</td><td>19.6</td></tr></table>	取付の高さ	2.1m	2.4m	2.6m	3.0m	4.0m	5.0m	6.0m	単体配置 A1	5.5	6.1	6.4	7.0	8.0	6.6	5.6	直線配置 A2	11.6	13.0	13.8	15.4	18.8	21.4	22.4	四角配置 A4	8.9	10.0	10.7	12.0	15.0	17.5	19.6	LEDEM30621M ¥97,200 ○ 定格消費電力 1.5W 蓄電池:7HR-AH-SLN 非常灯評定番号 LALE-025 保守率 0.93(照度2ルクスの範囲) <table><tr><td>取付の高さ</td><td>2.1m</td><td>2.4m</td><td>2.6m</td><td>3.0m</td><td>4.0m</td><td>5.0m</td><td>6.0m</td></tr><tr><td>単体配置 A1</td><td>5.5</td><td>6.1</td><td>6.4</td><td>7.0</td><td>8.0</td><td>6.6</td><td>5.6</td></tr><tr><td>直線配置 A2</td><td>11.6</td><td>13.0</td><td>13.8</td><td>15.4</td><td>18.8</td><td>21.4</td><td>22.4</td></tr><tr><td>四角配置 A4</td><td>8.9</td><td>10.0</td><td>10.7</td><td>12.0</td><td>15.0</td><td>17.5</td><td>19.6</td></tr></table>	取付の高さ	2.1m	2.4m	2.6m	3.0m	4.0m	5.0m	6.0m	単体配置 A1	5.5	6.1	6.4	7.0	8.0	6.6	5.6	直線配置 A2	11.6	13.0	13.8	15.4	18.8	21.4	22.4	四角配置 A4	8.9	10.0	10.7	12.0	15.0	17.5	19.6
取付の高さ	2.1m	2.4m	2.6m	3.0m	4.0m	5.0m	6.0m																																																																																												
単体配置 A1	5.5	6.1	6.4	7.0	8.0	6.6	5.6																																																																																												
直線配置 A2	11.6	13.0	13.8	15.4	18.8	21.4	22.4																																																																																												
四角配置 A4	8.9	10.0	10.7	12.0	15.0	17.5	19.6																																																																																												
取付の高さ	2.1m	2.4m	2.6m	3.0m	4.0m	5.0m	6.0m																																																																																												
単体配置 A1	5.5	6.1	6.4	7.0	8.0	6.6	5.6																																																																																												
直線配置 A2	11.6	13.0	13.8	15.4	18.8	21.4	22.4																																																																																												
四角配置 A4	8.9	10.0	10.7	12.0	15.0	17.5	19.6																																																																																												
取付の高さ	2.1m	2.4m	2.6m	3.0m	4.0m	5.0m	6.0m																																																																																												
単体配置 A1	5.5	6.1	6.4	7.0	8.0	6.6	5.6																																																																																												
直線配置 A2	11.6	13.0	13.8	15.4	18.8	21.4	22.4																																																																																												
四角配置 A4	8.9	10.0	10.7	12.0	15.0	17.5	19.6																																																																																												
30形 中天井用 [~8m]	LEDEM30223M ¥97,200 ○ 定格消費電力 1.5W 蓄電池:7HR-AH-BE 非常灯評定番号 LALE-025 保守率 0.93(照度2ルクスの範囲) <table><tr><td>取付の高さ</td><td>4.0m</td><td>5.0m</td><td>6.0m</td><td>7.0m</td><td>8.0m</td></tr><tr><td>単体配置 A1</td><td>7.6</td><td>8.6</td><td>6.6</td><td>5.8</td><td>4.3</td></tr><tr><td>直線配置 A2</td><td>16.4</td><td>19.6</td><td>22.2</td><td>24.0</td><td>23.8</td></tr><tr><td>四角配置 A4</td><td>12.4</td><td>15.0</td><td>17.4</td><td>19.6</td><td>21.5</td></tr></table>	取付の高さ	4.0m	5.0m	6.0m	7.0m	8.0m	単体配置 A1	7.6	8.6	6.6	5.8	4.3	直線配置 A2	16.4	19.6	22.2	24.0	23.8	四角配置 A4	12.4	15.0	17.4	19.6	21.5		LEDEM30622M ¥97,200 ○ 定格消費電力 1.5W 蓄電池:7HR-AH-SLN 非常灯評定番号 LALE-025 保守率 0.93(照度2ルクスの範囲) <table><tr><td>取付の高さ</td><td>4.0m</td><td>5.0m</td><td>6.0m</td><td>7.0m</td><td>8.0m</td></tr><tr><td>単体配置 A1</td><td>7.6</td><td>8.6</td><td>6.6</td><td>5.8</td><td>4.3</td></tr><tr><td>直線配置 A2</td><td>16.4</td><td>19.6</td><td>22.2</td><td>24.0</td><td>23.8</td></tr><tr><td>四角配置 A4</td><td>12.4</td><td>15.0</td><td>17.4</td><td>19.6</td><td>21.5</td></tr></table>	取付の高さ	4.0m	5.0m	6.0m	7.0m	8.0m	単体配置 A1	7.6	8.6	6.6	5.8	4.3	直線配置 A2	16.4	19.6	22.2	24.0	23.8	四角配置 A4	12.4	15.0	17.4	19.6	21.5																																																
取付の高さ	4.0m	5.0m	6.0m	7.0m	8.0m																																																																																														
単体配置 A1	7.6	8.6	6.6	5.8	4.3																																																																																														
直線配置 A2	16.4	19.6	22.2	24.0	23.8																																																																																														
四角配置 A4	12.4	15.0	17.4	19.6	21.5																																																																																														
取付の高さ	4.0m	5.0m	6.0m	7.0m	8.0m																																																																																														
単体配置 A1	7.6	8.6	6.6	5.8	4.3																																																																																														
直線配置 A2	16.4	19.6	22.2	24.0	23.8																																																																																														
四角配置 A4	12.4	15.0	17.4	19.6	21.5																																																																																														
30形 高天井用 [~10m]	LEDEM30224M ¥97,200 ○ 定格消費電力 1.5W 蓄電池:7HR-AH-BE 非常灯評定番号 LALE-025 保守率 0.93(照度2ルクスの範囲) <table><tr><td>取付の高さ</td><td>5.0m</td><td>6.0m</td><td>7.0m</td><td>8.0m</td><td>9.0m</td><td>10.0m</td></tr><tr><td>単体配置 A1</td><td>6.7</td><td>7.5</td><td>8.0</td><td>8.3</td><td>7.8</td><td>6.1</td></tr><tr><td>直線配置 A2</td><td>14.2</td><td>16.6</td><td>18.6</td><td>20.2</td><td>21.6</td><td>22.6</td></tr><tr><td>四角配置 A4</td><td>10.7</td><td>12.6</td><td>14.4</td><td>16.0</td><td>17.5</td><td>18.8</td></tr></table>	取付の高さ	5.0m	6.0m	7.0m	8.0m	9.0m	10.0m	単体配置 A1	6.7	7.5	8.0	8.3	7.8	6.1	直線配置 A2	14.2	16.6	18.6	20.2	21.6	22.6	四角配置 A4	10.7	12.6	14.4	16.0	17.5	18.8		LEDEM30623M ¥97,200 ▲ 定格消費電力 1.5W 蓄電池:7HR-AH-SLN 非常灯評定番号 LALE-025 保守率 0.93(照度2ルクスの範囲) <table><tr><td>取付の高さ</td><td>5.0m</td><td>6.0m</td><td>7.0m</td><td>8.0m</td><td>9.0m</td><td>10.0m</td></tr><tr><td>単体配置 A1</td><td>6.7</td><td>7.5</td><td>8.0</td><td>8.3</td><td>7.8</td><td>6.1</td></tr><tr><td>直線配置 A2</td><td>14.2</td><td>16.6</td><td>18.6</td><td>20.2</td><td>21.6</td><td>22.6</td></tr><tr><td>四角配置 A4</td><td>10.7</td><td>12.6</td><td>14.4</td><td>16.0</td><td>17.5</td><td>18.8</td></tr></table>	取付の高さ	5.0m	6.0m	7.0m	8.0m	9.0m	10.0m	単体配置 A1	6.7	7.5	8.0	8.3	7.8	6.1	直線配置 A2	14.2	16.6	18.6	20.2	21.6	22.6	四角配置 A4	10.7	12.6	14.4	16.0	17.5	18.8																																								
取付の高さ	5.0m	6.0m	7.0m	8.0m	9.0m	10.0m																																																																																													
単体配置 A1	6.7	7.5	8.0	8.3	7.8	6.1																																																																																													
直線配置 A2	14.2	16.6	18.6	20.2	21.6	22.6																																																																																													
四角配置 A4	10.7	12.6	14.4	16.0	17.5	18.8																																																																																													
取付の高さ	5.0m	6.0m	7.0m	8.0m	9.0m	10.0m																																																																																													
単体配置 A1	6.7	7.5	8.0	8.3	7.8	6.1																																																																																													
直線配置 A2	14.2	16.6	18.6	20.2	21.6	22.6																																																																																													
四角配置 A4	10.7	12.6	14.4	16.0	17.5	18.8																																																																																													
30形 特高天井用 [~16m]	LEDEM30225M ¥97,200 ▲ 定格消費電力 1.5W 蓄電池:7HR-AH-BE 非常灯評定番号 LALE-025 保守率 0.93(照度2ルクスの範囲) <table><tr><td>取付の高さ</td><td>9.0m</td><td>10.0m</td><td>12.0m</td><td>14.0m</td><td>16.0m</td></tr><tr><td>単体配置 A1</td><td>7.0</td><td>7.4</td><td>8.0</td><td>7.9</td><td>7.2</td></tr><tr><td>直線配置 A2</td><td>15.2</td><td>16.4</td><td>18.8</td><td>20.6</td><td>22.0</td></tr><tr><td>四角配置 A4</td><td>11.5</td><td>12.5</td><td>14.6</td><td>16.5</td><td>18.1</td></tr></table>	取付の高さ	9.0m	10.0m	12.0m	14.0m	16.0m	単体配置 A1	7.0	7.4	8.0	7.9	7.2	直線配置 A2	15.2	16.4	18.8	20.6	22.0	四角配置 A4	11.5	12.5	14.6	16.5	18.1		※LEDEM30225M+LEDEM05022の 組合せで対応可能																																																																								
取付の高さ	9.0m	10.0m	12.0m	14.0m	16.0m																																																																																														
単体配置 A1	7.0	7.4	8.0	7.9	7.2																																																																																														
直線配置 A2	15.2	16.4	18.8	20.6	22.0																																																																																														
四角配置 A4	11.5	12.5	14.6	16.5	18.1																																																																																														
仕様・寸法	仕様 本体:ADC 天板:SGC 化粧枠:CGC t0.6 白(0.2PB 9.2/0.4) レンズ:ガラス 質量:0.6kg(0.5kg)  ()内は9形、13形	仕様 本体:ADC 天板:SGC 化粧枠:CGC t0.6 黒(N1.5) レンズ:ガラス 質量:0.6kg(0.5kg)  ()内は9形、13形	仕様 本体:SGC 化粧枠:CGC t0.6 白(0.2PB 9.2/0.4) レンズ:ガラス 質量:1.0kg(0.9kg)  ()内は13形																																																																																																

【共通仕様】 ●リモコン自己点検機能付 ●電池内蔵形 ●ニッケル水素蓄電池
☐電源電圧100V~242V ☐昼白色(5000K) ☐Ra70 ☐適合リモコン(別売)FRC-1833T
 【注意事項】 水平天井取付専用 調光不可 断熱施工使用不可